



ESS Series Hybrid Charger & Inverter (Single-phase)



ESS 10K~20K / ESS-B 10K~20K

Features


- Built-in MPPT solar controller, maximize the utilization of solar panel
- Integrated design with controller, inverter and isolated technique
- Solar controller modular design, hot plug function, flexible configuration, easy capacity expansion
- Intelligent battery management and temperature compensation function
- Pure sine wave output, output isolated transformer, safe and stable
- It supports mains/generator input (optional)
- Output isolated transformer, safe and stable
- LCD display + LED status indicator
- Perfect protection
- 92% system efficiency
- Strong environment adaptability



SC22050-ESS

Description

ESS series single-phase off-grid inverter adopts integrated design of solar controller, inverter and isolated transformer. The controller adopts MPPT technology and intelligent battery management design which is very efficient and smart; integrated pure sine wave inverter and low frequency isolated transformer make it with excellent overload performance, suitable for a variety of electrical appliances. ESS series controller adopts modular design with flexible configuration; the inverter is with output of 10kVA~20KVA, supplying power for the places without city power e.g. remote areas, pastoral areas, islands, communication base stations, bringing customer the optimized social, economical and environmental benefits. It supports mains/generator input (optional), take advantages of old diesel generators, saving initial investment and operation maintenance cost.

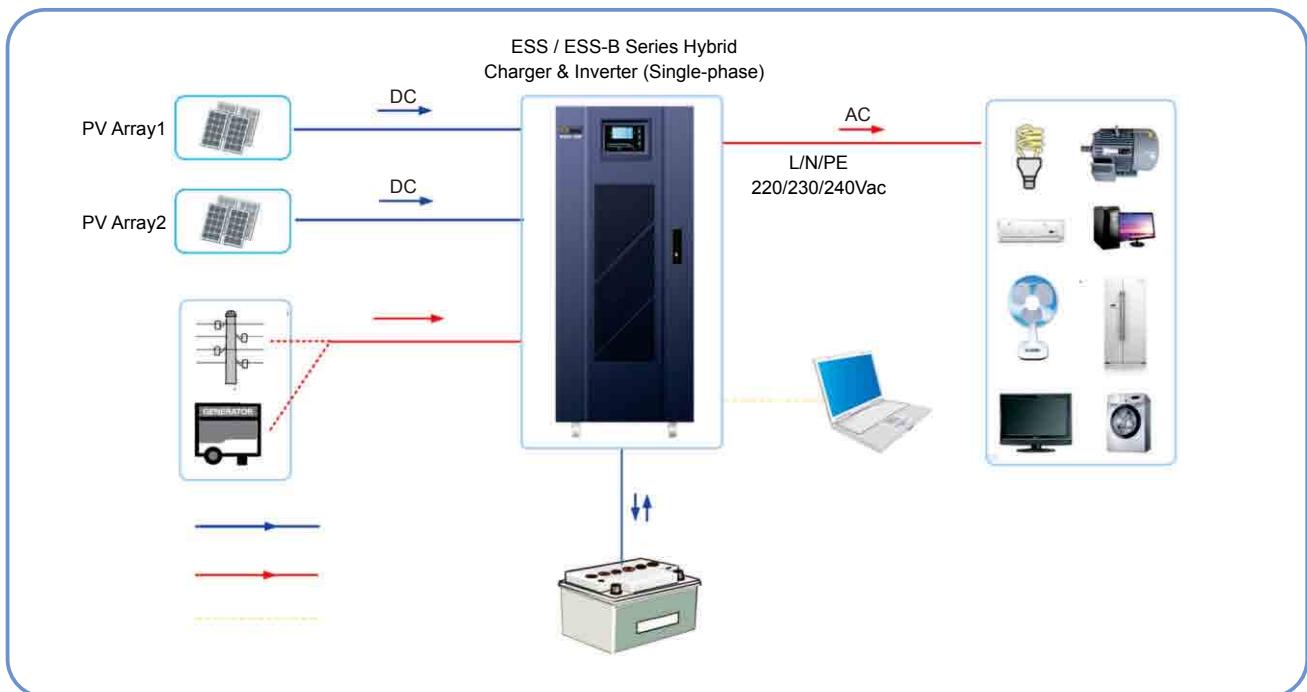

Technical data

System (without AC bypass)			
Model	ESS 10K	ESS15K	ESS 20K
DC Input (PV Side)			
MPP voltage range (Vdc)		250~450	
PV max voltage (Vdc)		460	
Recommended MPP voltage (Vdc)		330	
Rated power (kW)		20 (1~2*10kW module optional)	
Inverter Output			
Output voltage (Vac)		L/N/PE, 220/230/240	
Output wave		Pure sine wave	
Rated power (kVA)	10	15	20
Power factor		0.8	
AC current crest factor		3:1	
Overload capacity		105%~110%, 10mins; 110%~125%, 1min, >125%, 10s	
Voltage THD		THDU<3%, linear load; THDU<5%, nonlinear load	
Isolation		Low frequency transformer	
Battery			
Rated voltage (Vdc)		220	
Battery type		Lead-acid battery	
General Data			
Operating temperature range (°C)		-20~50 (>50°C derating)	
Relative humidity in operation		0~95% (non-condensing)	
Max. operating altitude (m)		6000 (>3000m derating)	
Display		LCD+LED	
Communication		RS485, dry contact	
Ingress protection rating		IP20	
Dimension (D*W*H mm)		610*455*1125	
Weight (kg)	101	114	124
PV Control Module			
Model		SC22050 -ESS	
Control type		MPPT control	
MPPT efficiency		>99.5%	
MPP voltage range (Vdc)		250~450	
Max. input voltage (Vac)		460	
Max. input power (kW)		11	
Max. input current (A)		45	
Output voltage range (Vdc)		192~264	
Max .output current (A)		50	
Max. efficiency		98%	
Module dimension (D*W*H mm)		415*356*84.5	
Module weight (kg)		11	

Data may change without any notice.

Data may change without any notice.

Technical data

System (with AC bypass)			
Model	ESS-B 10K	ESS-B 15K	ESS-B 20K
DC Input (PV Side)			
MPP voltage range (Vdc)		250~450	
PV max voltage (Vdc)		460	
Recommended MPP voltage (Vdc)		330	
Max. power (kW)		20 (1~2 10kW module optional)	
AC Input			
AC input voltage range (Vac)		220/230/240±25%	
AC input voltage frequency (Hz)		50/60±5%	
Inverter Output			
Output voltage (Vac)		L/N/PE, 220/230/240	
Output wave		Pure sine wave	
Rated power (kW/kVA)	8/10	12/15	16/20
AC current crest factor		3:1	
Overload capacity		105%~110%, 10mins; 110%~125%, 1min; >125%, 10s	
Voltage THD		THDU<3%, linear load; THDU<5%, nonlinear load	
Isolation		Low frequency transformer	
Battery			
Rated voltage (Vdc)		220	
Battery type		Lead-acid battery	
General Data			
Operating temperature range (°C)		-20~50 (>50°C derating)	
Relative humidity in operation		0~95% (non-condensing)	
Max. operating altitude (m)		6000 (>3000m derating)	
Display		LCD+LED	
Communication		RS485, dry contact	
Dimension (D*W*H mm)		610*455*1125	
Weight (kg)	101	114	124
PV Control Module			
Model		SC22050 -ESS	
Control type		MPPT control	
MPPT efficiency		>99.5%	
MPP voltage range (Vdc)		250~450	
Max. input voltage (Vdc)		460	
Max. input power (kW)		11	
Max. input current (A)		45	
Output voltage range (Vdc)		192~264	
Max. output current (A)		50	
Max. efficiency		98%	
Module dimension (D*W*H mm)		415*356*84.5	
Module weight (kg)		11	